


ManuFlo also supplies equipment for grout mix, shotcrete, admixtures and tradewaste.


ManuFlo manufactures, repairs, services and calibrates flowmetering equipment and systems.

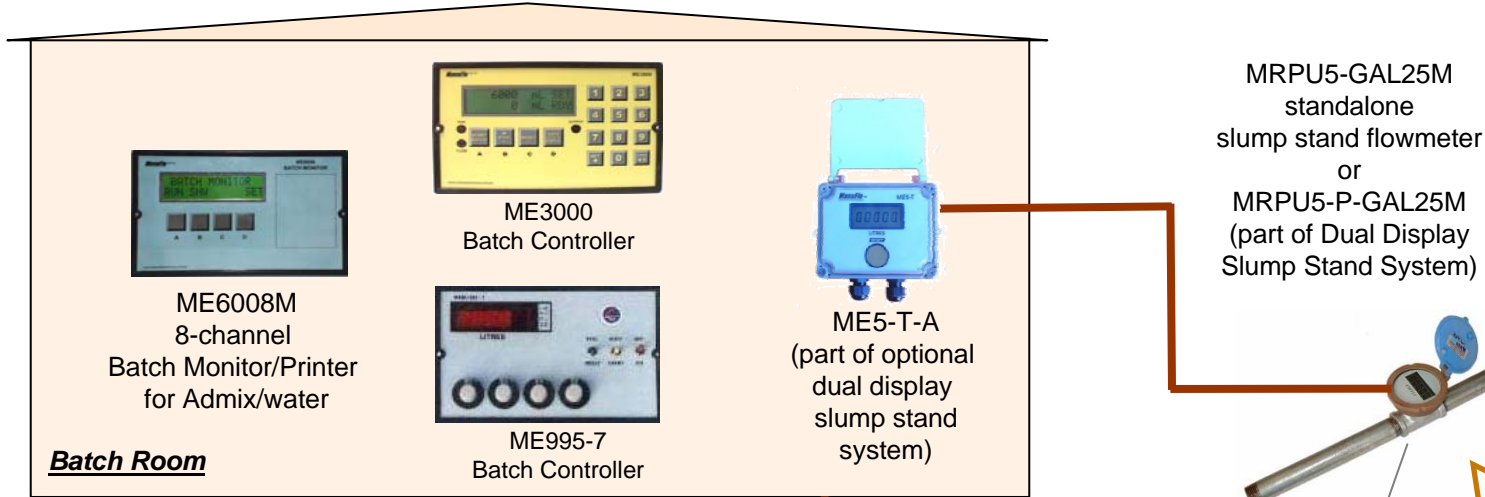

Water Supply
mains or recycled

Typical Batching Installation

Slumpstand

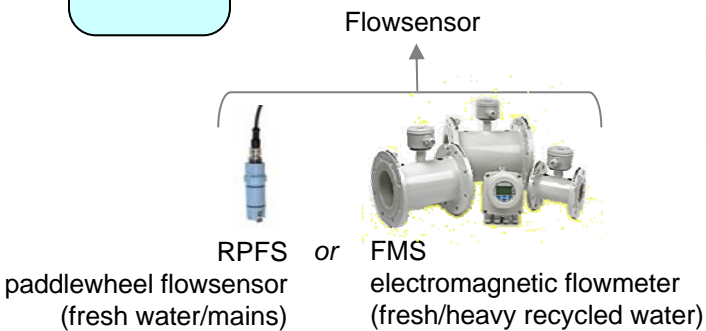

Reconditioning service available. Save \$\$\$



ME995-7

- Batch Controller.
- select batch quantity via rotary dials to 9999 Litres.
- batching safety features.
- K-factor calibration (to set pulses/Litre).
- interface options available.

MRP20-T2

- 20mm flowmeter for concrete agitator trucks.
- 5-digit LCD shows total Litres.
- closing lid resets Litres count.
- paddlewheel type.
- flowrange: 15–150 Litres/min.



RPFS-P

- flow sensor.
- paddlewheel type.
- for fresh/mains water.
- fits into pipe adapters of various types and sizes 20-200mm.




ME3000

- Batch Controller.
- displays in ml or Litres.
- IP64 touch panel.
- fully programmable.
- batching safety features.
- interface options available, including printer for batch tickets and batch record.

DSSS-1

- Dual display Slump Stand / BatchRoom water measurement system.

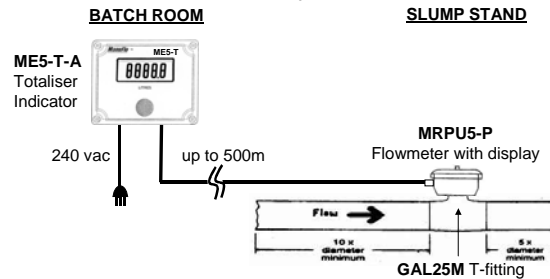

FMS

- Electromagnetic flowmeters.
- in sizes 25-200mm.
- no moving parts.
- virtually maintenance free.
- for heavy recycled water.
- optional connection kits available in PVC or Gal.



Ideal for QA printout in manual batch plants.

ME6008M

- Batch Monitor/Printer.
- Monitors and prints up to 8 channels of water and admixture.
- IP65 touch panel.
- fully programmable.
- optional printer.

MRPU5-GAL25M

- 25mm slump stand meter.
- 5-digit LCD shows total Litres.
- closing lid resets Litres count.
- flowrange: 18-235 Litres/min.
- available in larger sizes for manual batching of plant water e.g. 50mm MRP5-GAL50M.



Solenoid Valves

- fast acting solenoid valves.
- for water.
- in various types and sizes.
- with or without air assist.