

FLOWRATE FLOWMETERS



MESLCD5DP-F series

- 5-digit LCD shows Flowrate in Litres/min to 1 decimal place.
- Sizes: 20-50mm
- Series flowrange: 1.5 - 600 Litres/min.
- Accuracy: $\pm 2\%$
- Nutating disc measuring chamber.
- Internal Lithium battery powered.



MRPU5-F series

- 5-digit LCD shows Flowrate in Litres/min to 1 decimal place.
- Sizes: 25-200mm.
- Series flowrange: 18 - 15070 Litres/min.
- Accuracy: $\pm 3\%$
- Paddlewheel type. Various pipe adapters.
- Internal Lithium battery powered.

with integral display


ME5-F-B Flowrate Indicator

- LCD shows Flowrate.
- Programmable.
- internal Lithium battery (5 - 10 year battery life).
- IP65 enclosure.
- with cover to protect LCD from UV light.




FRT303-B Indicator

- LCD shows Flowrate, Total (resetable) and Grand Total.
- Programmable.
- internal Lithium battery (5 - 10 year battery life).
- IP65 enclosure.
- with cover to protect LCD from UV light.

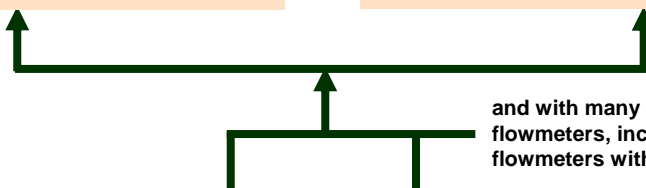

and with many other ManuFlo pulse output flowmeters, including Electromagnetic flowmeters with in-built flowrate display.

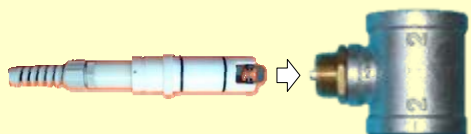

RPFS-L

- paddlewheel flow sensor.
- inductive coil pulse output.
- with various adapters for 20-500mm pipes.
- series flowrange: 9.5 - 100,000 Litres/min
- for fresh or mild recycled water.



MESR series

- nutating disc type flowmeter.
- with Reed Switch Pulse output.
- in sizes 20-50 mm.
- power not required.
- series flowrange: 1.5 - 600 Litres/min

with remote display

ManuFlo [®]TM
Flow Measurement & Control Products

a division of

MANU ELECTRONICS PTY LTD

Rev: 0903/1

41 Carter Road, Brookvale
Sydney NSW 2100 Australia
Ph: + 61 2 9905-4324, 9938-1425
Fax: + 61 2 9938-5852

Web: www.manuelectronics.com.au
Email: sales@manuelectronics.com.au