

Tradewaste Flowmeters


Compliant to SA Water requirements

You need to **tell us your:**

- pipe diameter e.g. 50mm;
- pipe type e.g. PVC, Galvanised Iron;
- liquid being measured;
- approx. min & max flowrate in Litres/min;
- approx. discharge volume in Litres/day.



Flowmeter is delivered ready to install:


- ☺ With SA Water special tradewaste sampler plug* fitted. 
- ☺ Fully programmed to SA Water specifications.
- ☺ Sensor wired to Display, which has a boundless totaliser.
- ☺ With Flanged Connection Kit (if requested).
- ☺ Tested (calibration certificate supplied).
- ☺ Automatically self-verifies, for the ultimate in operational stability and repeatability.

* Amphenol 6-pin connector:

- Pin A + Pulse output
- Pin C - Pulse output
- Pin E + Analogue output
- Pin F - Analogue output

Technical details

- **Pipe sensor:** Obstructionless bore (virtually maintenance free).
- **Display:** includes Total and Flowrate.
- **Connection:**
 - 40 & 50mm: AS2129 Table F flanged.
 - all other sizes: AS4087 flanged, Class 16.
- **Power:** 85 - 265vac
- **Cable:** 2-metre power lead

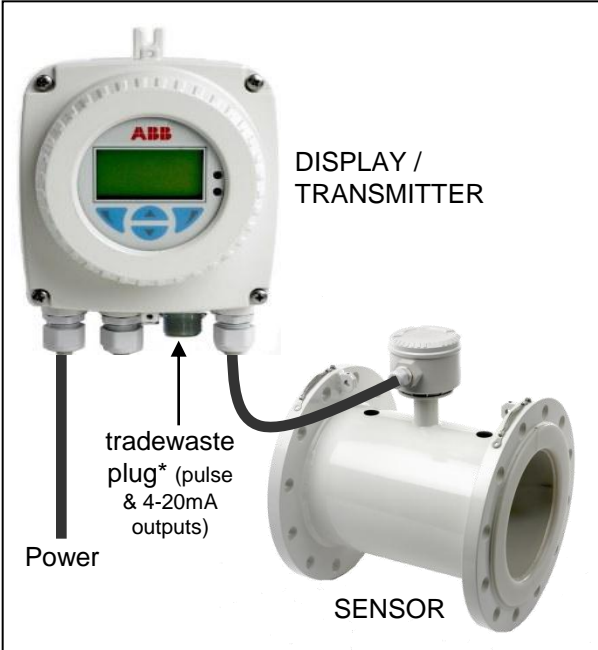

For pipe sizes:

25, 40, 50, 80, 100, 150 & 200mm

with optional PVC or GAL connection kits (up to 150mm size) for easy plumbing install.

ManuFlo®™

Flow Measurement & Control Products

- Sydney-based company, founded in 1965.
- One of the founding companies in tradewaste measurement (1984).

41 Carter Road, Brookvale
Sydney NSW 2100 Australia
Ph: + 61 2 9905-4324, 9938-1425
Fax: + 61 2 9938-5852

Web: www.manuelectronics.com.au
Email: sales@manuelectronics.com.au